Tiefton-Lautsprecher WESTRA KW-180-2694

NOMINAL POWER HANDLING ACC. DIN IEC 268:	PN:	60 W
NOMINAL IMPEDANCE:	ZN:	4 Ω
VOICE COIL RESISTANCE:	RE:	3,7 Ω ± 10%
FREE AIR RESONANT FREQUENCY	fr:	42 Hz ± 20%
FREQUENCY RANGE ACC. DIN IEC 268:		50 - 4000 Hz
VOICE COIL CARRIER MATERIAL:		ALUMINIUM
VOICE COIL DIAMETER:		26,3 mm
SENSITIVITY ACC. DIN IEC 268 (1W, 1m).		86 dB ±1 dB
TOTAL WEIGHT OF UNIT:		1540 g

CHARACTERISTICS:
COATED DIAPHRAGM, RUBBER EDGE, SILVER LIZ WIRE

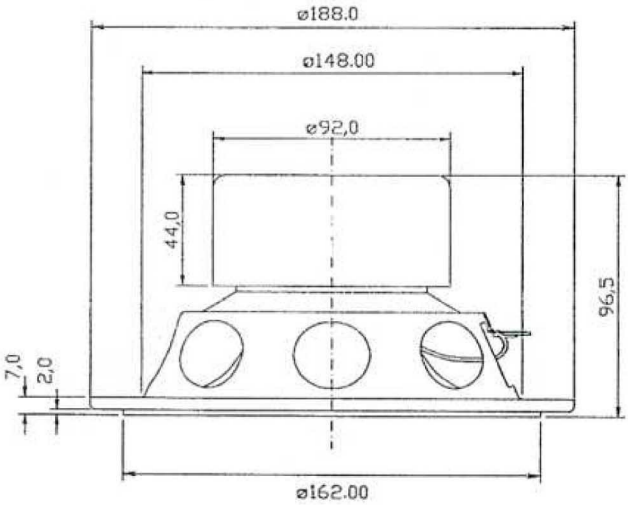

DIMENSIONS IN MM

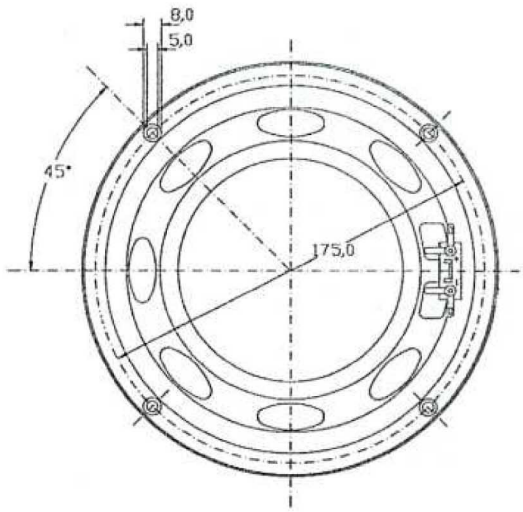
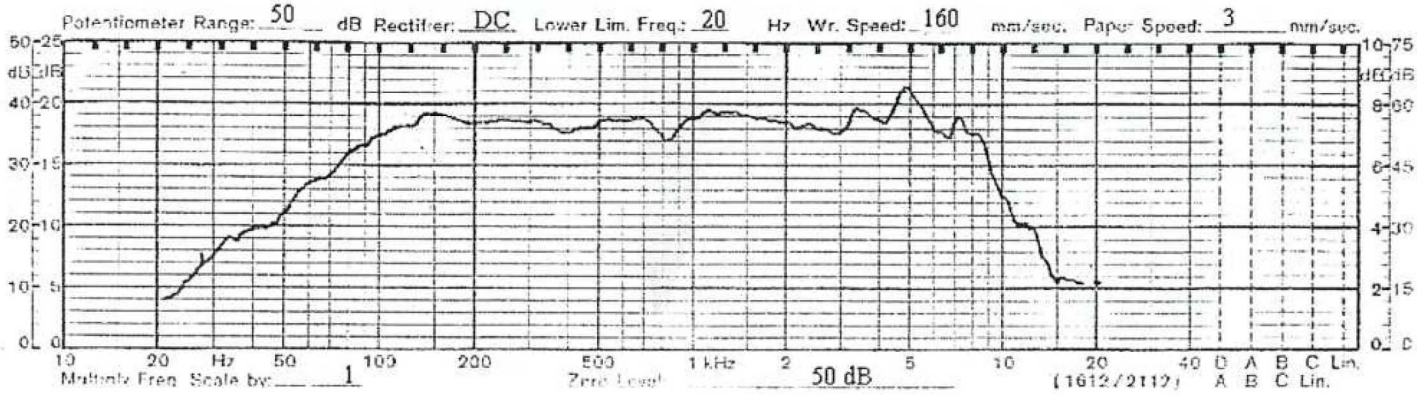
FREQUENCY RESPONSE ACC. DIN IEC 268 IEC BAFFLE P=1W, d=1m, SWEEPED SINE WAVE